



5 SERIES

Kingpinless Pressed Steel

Ideally suited for moving moderate to heavy loads over flat surfaces, Revvo TS5 Series casters are available in three wheel sizes (6", 6-1/4" & 8") with load capacities ranging from 660 to 2,200 lbs. Swivel models (TS5/BS5) are fitted with head seals to prevent the ingress of dirt and dust into the swivel head. Fixed models (TF5) are fitted with oblong top plates. Please consult factory for load capacities of bolt hole models.


Options & Accessories

See Page 8 for complete specifications, availability and ordering information


| Item | Availability | Order Ref. |
|---------------------|-------------------|------------|
| Threadguards | Swivel & Fixed* | T |
| Head Seals | Swivel (standard) | S |
| Wheel Lock | Swivel | W |
| Foot Brake | Swivel (6" & 8") | H |
| Swivel & Wheel Lock | Swivel (6" & 8") | L |
| Round Steel Plugs | Bolt Hole | RP |

* Threadguards are available for all 5 Series casters except models with Green Rubber wheels

Note: Head Seals are fitted standard on all top plate and bolt hole 5 Series swivel casters.

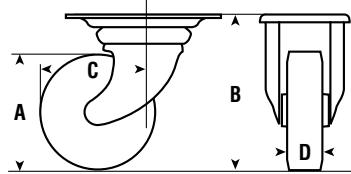

Standard Top Plate

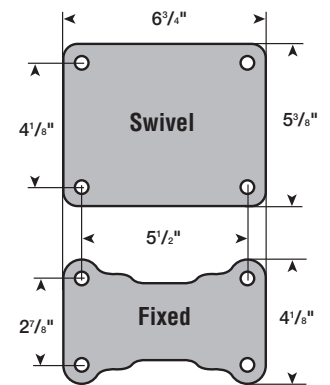

TS5/TF5 top plates have fixing holes to suit 3/8" diameter bolts.

BS5 bolt hole frames have a mounting center hole of 3/4".

A = Wheel Diameter B = Overall Height C = Swivel Radius D = Tread Width

| 5 SERIES | | | | TS5/TF5* | Top Plate | | Bolt Hole | | |
|----------|---------|---------|--------|---------------|----------------|---------------|---------------|--------------|---------------|
| A | B | C | D | Load Capacity | Bearing | Wheel | Swivel Part # | Fixed Part # | Swivel Part # |
| 6" | 8" | 5-1/16" | 1-1/2" | 1100 | Roller | Nylon | TS5 150 NY15 | TF5 150 NY15 | BS5 150 NY15 |
| 6" | 8" | 5-1/16" | 1-1/2" | 1760 | Precision Ball | Nylon | TS5 150 NY2H | TF5 150 NY2H | BS5 150 NY2H |
| 6" | 8" | 5-1/16" | 2" | 1200 | Roller | Phenolic | TS5 150 RP1G | TF5 150 RP1G | BS5 150 RP1G |
| 6" | 8" | 5-1/16" | 1-3/4" | 800 | Roller | Rubber Tire | TS5 150 RU15 | TF5 150 RU15 | BS5 150 RU15 |
| 6" | 8" | 5-1/16" | 1-3/4" | 800 | Precision Ball | Rubber Tire | TS5 150 RU2H | TF5 150 RU2H | BS5 150 RU2H |
| 6" | 8" | 5-1/16" | 1-1/2" | 1600 | Roller | Revvothane | TS5 150 PT15 | TF5 150 PT15 | BS5 150 PT15 |
| 6" | 8" | 5-1/16" | 2" | 750 | Roller | Polypropylene | TS5 150 PL1G | TF5 150 PL1G | BS5 150 PL1G |
| 6" | 8" | 5-1/16" | 1-3/4" | 2000 | Roller | Cast Iron | TS5 150 CI15 | TF5 150 CI15 | BS5 150 CI15 |
| 6" | 8" | 5-1/16" | 1-1/2" | 1250 | Roller | Polyurethane | TS5 150 PU1G | TF5 150 PU1G | BS5 150 PU1G |
| 6 1/4" | 8-3/16" | 5-1/4" | 1-5/8" | 660 | Precision Ball | Green Rubber | TS5 160 GR2H | TF5 160 GR2H | BS5 160 GR2H |
| 8" | 9-3/4" | 6-1/16" | 1-1/2" | 1100 | Roller | Nylon | TS5 200 NY15 | TF5 200 NY15 | BS5 200 NY15 |
| 8" | 9-3/4" | 6-1/16" | 1-1/2" | 2200 | Precision Ball | Nylon | TS5 200 NY2H | TF5 200 NY2H | BS5 200 NY2H |
| 8" | 9-3/4" | 6-1/16" | 1-5/8" | 880 | Precision Ball | Green Rubber | TS5 200 GR2H | TF5 200 GR2H | BS5 200 GR2H |
| 8" | 9-3/4" | 6-1/16" | 2" | 1400 | Roller | Phenolic | TS5 200 RP1G | TF5 200 RP1G | BS5 200 RP1G |
| 8" | 9-3/4" | 6-1/16" | 2" | 1175 | Roller | Rubber Tire | TS5 200 RU15 | TF5 200 RU15 | BS5 200 RU15 |
| 8" | 9-3/4" | 6-1/16" | 2" | 1175 | Precision Ball | Rubber Tire | TS5 200 RU2H | TF5 200 RU2H | BS5 200 RU2H |
| 8" | 9-3/4" | 6-1/16" | 1-3/4" | 2200 | Roller | Revvothane | TS5 200 PT15 | TF5 200 PT15 | BS5 200 PT15 |
| 8" | 9-3/4" | 6-1/16" | 2" | 1000 | Roller | Polypropylene | TS5 200 PL1G | TF5 200 PL1G | BS5 200 PL1G |
| 8" | 9-3/4" | 6-1/16" | 1-3/4" | 2200 | Roller | Cast Iron | TS5 200 CI15 | TF5 200 CI15 | BS5 200 CI15 |
| 8" | 9-3/4" | 6-1/16" | 2" | 1925 | Roller | Polyurethane | TS5 200 PU1G | TF5 200 PU1G | BS5 200 PU1G |

* Load capacities are shown for top plate models (TS5/TF5) only. Please consult factory for load capacities of individual bolt hole casters.



OPTIONS & ACCESSORIES


1 Series 2 Series 3 Series 4 Series 5 Series

Threadguards (T)

- For swivel casters only
- Prevents string, thread, etc. from binding the wheel
- To order, add suffix **T** to Swivel Part #

Available for:

- 1 Series - TS1/BS1
- 2 Series - TS2/BS2
- 3 Series - TS3/BS3
- 4 Series - TS4/BS4
- 5 Series - TS5/BS5





Expanding Plugs (R/S)

Supplied in three Round (nylon) sizes:

| Expands from | Reference # |
|------------------|-------------|
| 19/32" to 23/32" | R15 |
| 23/32" to 27/32" | R18 |
| 27/32" to 31/32" | R21 |

Supplied in two Square (steel) sizes:

| Expands from | Reference # |
|------------------|-------------|
| 19/32" to 21/32" | S15 |
| 27/32" to 15/16" | S21 |



To order round or square plugs, add Reference # to Swivel Part #

Available for:


- 1 Series - BS1
- 2 Series - BS2

Head Seals (S)

- For swivel casters only
- Prevents the ingress of dirt and dust to swivel head
- To order, add suffix **S** to Swivel Part #

Available for:

- 3 Series - TS3/BS3
- 4 Series - TS4/BS4
- 5 Series - TS5/BS5



Sprung Plugs (SA)

For mobile steps - fitted with a 5-1/4" stepped plug fitted into a 1" O.D. outer sleeve that compresses on loading


Supplied in two spring weights:

| Spring weight | Reference # |
|---------------|-------------|
| 33 lbs. | SA1 |
| 66 lbs. | SA2 |

To order, add Reference # to Swivel Part #

Available for:

- 1 Series - BS1
- 2 Series - BS2




Foot Brake (B)

- For light-duty swivel casters only
- Foot-operated pedal locks wheel
- To order, add suffix **B** to Swivel Part #

Available for:

- 1 Series - TS1/BS1 (2" & 2-1/2" only)
- 2 Series - TS2/BS2
- 3 Series - TS3/BS3




Round Steel Plugs (RP)

Supplied in two sizes:

| Plug Diameter | Reference # |
|---------------|-------------|
| 1" | RP3 |
| 1-1/4" | RP5 |

Available for:

- 3 Series - BS3
- 4 Series - BS4




Foot Brake (H)

- For medium-duty swivel casters only
- Foot-operated pedal locks wheel
- To order, add suffix **H** to Swivel Part #

Available for:

- 4 Series - TS4/BS4 (4" & 5" only)
- 5 Series - TS5/BS5 (6" & 8" only)



Round Steel Plugs (RP)


Supplied in two sizes:

| Plug Diameter | Reference # |
|---------------|-------------|
| 1-3/8" | RP7 |
| 1-1/2" | RP8 |

To order, add Reference # to Swivel Part #

Available for:

- 5 Series - BS5



Wheel Lock (W)

- For swivel casters only
- A simple hand-operated parking lock
- To order, add suffix **W** to Swivel Part #

Available for:

- 4 Series - TS4/BS4
- 5 Series - TS5/BS5 (6" & 8" only)



Expanding Steel Plugs (EP)


Supplied in four sizes:

| Expands from | Reference # |
|--------------------|-------------|
| 23/32" to 25/32" | EP1 |
| 27/32" to 15/16" | EP2 |
| 31/32" to 1-1/32" | EP3 |
| 1-3/32" to 1-5/32" | EP4 |

To order, add Reference # to Part #

Available for:

- 3 Series - BS3
- 4 Series - BS4



Swivel & Wheel Lock (L)

- For swivel casters only
- The foot pedal locks both the wheel and swivel
- To order, add suffix **L** to Swivel Part #

Available for:

- 4 Series - TS4/BS4 (4" & 5" only)
- 5 Series - TS5/BS5 (6" & 8" only)

