
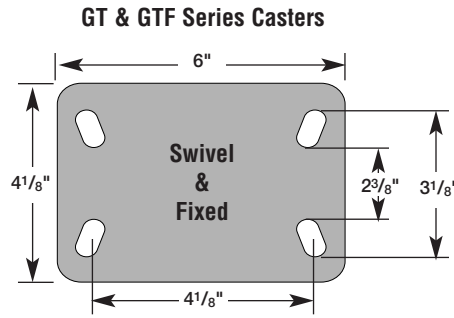


GT SERIES & GTF SERIES

The Flexello GF Series swivel and GTF Series fixed casters are available in sizes ranging from 6" to 10" with load capacities from 814 to 2,200 lbs. Featuring a rugged kingpinless design, these casters are ideal for handling power towing applications. Wheel options include Rubber on Cast Iron, Flexello Polyurethane on Cast Iron, Cast Iron and Phenolic for a variety of average-to-optimum working floor conditions.

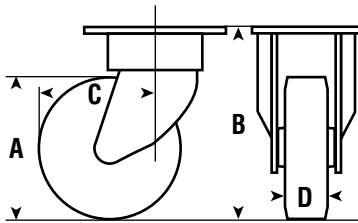

A = Wheel Diameter B = Overall Height C = Swivel Radius D = Tread Width

GT & GTF SERIES

| A | B | C | D | Load Capacity | Bearing | Wheel | Swivel Part # | Fixed Part # |
|-----|-----|--------|--------|---------------|--------------|---------------------------|---------------|--------------|
| 6" | 8" | 5-7/8" | 1-3/4" | 814 | Roller | Rubber on Cast Iron | GT-6RTB | GTF-6RT |
| 6" | 8" | 5-7/8" | 1-3/4" | 814 | Ball Journal | Rubber on Cast Iron | GT-6RTBJ | GTF-6RTBJ |
| 6" | 8" | 5-7/8" | 1-3/4" | 1386 | Roller | Polyurethane on Cast Iron | GT-6SUB | GTF-6SUB |
| 6" | 8" | 5-7/8" | 1-3/4" | 1386 | Ball Journal | Polyurethane on Cast Iron | GT-6SUBJ | GTF-6SUBJ |
| 6" | 8" | 5-7/8" | 1-3/4" | 1386 | Taper Roller | Polyurethane on Cast Iron | GT-6SUTM | GTF-6SUTM |
| 6" | 8" | 5-7/8" | 1-3/4" | 1200 | Roller | Phenolic | GT-6ANB | GTF-6ANB |
| 6" | 8" | 5-7/8" | 1-3/4" | 1804 | Roller | Cast Iron | GT-6CIB | GTF-6CIB |
| 8" | 10" | 7-1/4" | 2" | 1177 | Roller | Rubber on Cast Iron | GT-8RTB | GTF-8RTB |
| 8" | 10" | 7-1/4" | 2" | 1177 | Ball Journal | Rubber on Cast Iron | GT-8RTBJ | GTF-8RTBJ |
| 8" | 10" | 7-1/4" | 2" | 2090 | Roller | Polyurethane on Cast Iron | GT-8SUB | GTF-8SUB |
| 8" | 10" | 7-1/4" | 2" | 2090 | Ball Journal | Polyurethane on Cast Iron | GT-8SUBJ | GTF-8SUBJ |
| 8" | 10" | 7-1/4" | 2" | 2090 | Taper Roller | Polyurethane on Cast Iron | GT-8SUTM | GTF-8SUTM |
| 8" | 10" | 7-1/4" | 2" | 1400 | Roller | Phenolic | GT-8ANB | GTF-8ANB |
| 8" | 10" | 7-1/4" | 1-3/4" | 2000 | Roller | Cast Iron | GT-8CIB | GTF-8CIB |
| 10" | 12" | 7-3/8" | 2" | 1350 | Roller | Rubber on Cast Iron | GT-10RTB | GTF-10RTB |
| 10" | 12" | 7-3/8" | 2" | 1350 | Ball Journal | Rubber on Cast Iron | GT-10RTBJ | GTF-10RTBJ |
| 10" | 12" | 7-3/8" | 2" | 2200 | Roller | Polyurethane on Cast Iron | GT-10SUB | GTF-10SUB |
| 10" | 12" | 7-3/8" | 2" | 2200 | Ball Journal | Polyurethane on Cast Iron | GT-10SUBJ | GTF-10SUBJ |
| 10" | 12" | 7-3/8" | 2" | 2200 | Taper Roller | Polyurethane on Cast Iron | GT-10SUTM | GRF-10SUTM |
| 10" | 12" | 7-3/8" | 2" | 2200 | Roller | Cast Iron | GT-10CIB | GTF-10CIB |



GT Series Swivel



GTF Series Fixed



GT Series 2-Way Directional Lock

Foot Brakes

A foot brake is available for the GT Series caster in 8" and 10" diameters with Rubber-on-Cast-Iron or a Polyurethane-on-Cast-Iron wheel. The swivel radius is increased to 6" on 6" diameter wheels only. To order a foot brake, add suffix **BR** to the Swivel Part #.

2-Way Directional Wheel Lock

A two-way directional wheel lock is available to convert the GT Series swivel caster to a fixed caster by the release of a spring-loaded plunger. The locked direction of travel is in line with the longer side of the top plate. To order a directional lock, add suffix **L** to the Swivel Part #.

