



3 SERIES

Kingpinless Pressed Steel

Ideally suited for moving light loads over flat surfaces, Revvo 3 Series casters are available in four wheel sizes (2-1/2", 3", 4" & 5") with load capacities ranging from 65 to 275 lbs. Swivel and fixed models can be fitted with rectangular top plates (TS3/TF3) or bolt hole style frames

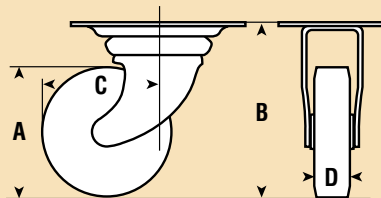


Standard Top Plate



TS3/TF3 top plates have fixing holes to suit 5/16" diameter bolts for the 3-1/8" x 2-3/8" plate, and 1/4" diameter bolts for the 3-1/2" x 2" plate.

Alternative T19 Top Plate



T19 top plates have fixing holes to suit 5/16" diameter bolts. To order, add suffix **T19** to Swivel Part #

A = Wheel Diameter B = Overall Height C = Swivel Radius D = Tread Width

3 SERIES				Top Plate				
A	B	C	D	Load Capacity	Bearing	Wheel	Swivel Part #	Fixed Part #
2-1/2"	3-11/16"	2-9/16"	1"	260	Plain	Nylon	TS3 063 NY03	TF3 063 NY03
2-1/2"	3-11/16"	2-9/16"	1"	65	Plain	Revolite	TS3 063 RL03	TF3 063 RL03
2-1/2"	3-11/16"	2-9/16"	1"	150	Plain	Rubber Tire	TS3 063 RU03	TF3 063 RU03
2-1/2"	3-11/16"	2-9/16"	1"	200	Plain	Revvothane	TS3 063 PT03	TF3 063 PT03
2-1/2"	3-11/16"	2-9/16"	1"	275	Plain	Cast Iron	TS3 063 CI03	TF3 063 CI03
3"	4-1/4"	2-13/16"	1"	275	Plain	Nylon	TS3 075 NY03	TF3 075 NY03
3"	4-1/4"	2-13/16"	1"	85	Plain	Revolite	TS3 075 RL03	TF3 075 RL03
3"	4-1/4"	2-13/16"	1"	275	Plain	Revvothane	TS3 075 PT03	TF3 075 PT03
3"	4-1/4"	2-13/16"	1"	150	Plain	Rubber Tire	TS3 075 RU03	TF3 075 RU03
3"	4-1/4"	2-13/16"	1"	275	Plain	Cast Iron	TS3 075 CI03	TF3 075 CI03
4"	5-3/16"	3-5/16"	1"	275	Plain	Nylon	TS3 100 NY03	TF3 100 NY03
4"	5-3/16"	3-5/16"	1"	110	Plain	Revolite	TS3 100 RL03	TF3 100 RL03
4"	5-3/16"	3-5/16"	1"	275	Plain	Revvothane	TS3 100 PT03	TF3 100 PT03
5"	6-3/16"	3-3/4"	1"	275	Plain	Nylon	TS3 125 NY03	
5"	6-3/16"	3-3/4"	1-1/8"	120	Plain	Revolite	TS3 125 RL03	

To order Bolt Hole casters: change the Part # reference T (for Top Plate) to B (for Bolt Hole). For example, BF3 063 NY03 is a 2-1/2" diameter bolt hole fixed caster with a nylon wheel and load capacity of 260 lbs. BS3/BF3 bolt hole frames have a mounting center hole of 1/2".

Options & Accessories

See Page 8 for complete specifications, availability and ordering information

Item	Availability	Order Ref.
Threadguards	Swivel & Fixed*	T
Head Seals	Swivel	S
Foot Brake	Swivel	B
Round Steel Plugs	Bolt Hole	RP
Expanding Steel Plugs	Bolt Hole	EP

* Available for all 3 Series casters except 2-1/2" model with Revvolite wheel



Top plate swivel style shown with nylon wheel and foot brake



OPTIONS & ACCESSORIES

1 Series

2 Series

3 Series

4 Series


5 Series

Threadguards (T)

- For swivel casters only
- Prevents string, thread, etc. from binding the wheel
- To order, add suffix **T** to Swivel Part #

Available for:

- 1 Series - TS1/BS1
- 2 Series - TS2/BS2
- 3 Series - TS3/BS3
- 4 Series - TS4/BS4
- 5 Series - TS5/BS5



Expanding Plugs (R/S)

Supplied in three Round (nylon) sizes:

Expands from	Reference #
19/32" to 23/32"	R15
23/32" to 27/32"	R18
27/32" to 31/32"	R21



Supplied in two Square (steel) sizes:

Expands from	Reference #
19/32" to 21/32"	S15
27/32" to 15/16"	S21

To order round or square plugs, add Reference # to Swivel Part #

Available for:

- 1 Series - BS1
- 2 Series - BS2




Head Seals (S)

- For swivel casters only
- Prevents the ingress of dirt and dust to swivel head
- To order, add suffix **S** to Swivel Part #

Available for:

- 3 Series - TS3/BS3
- 4 Series - TS4/BS4
- 5 Series - TS5/BS5



Sprung Plugs (SA)

For mobile steps - fitted with a 5-1/4" stepped plug fitted into a 1" O.D. outer sleeve that compresses on loading


Supplied in two spring weights:

Spring weight	Reference #
33 lbs.	SA1
66 lbs.	SA2

To order, add Reference # to Swivel Part #

Available for:

- 1 Series - BS1
- 2 Series - BS2




Foot Brake (B)

- For light-duty swivel casters only
- Foot-operated pedal locks wheel
- To order, add suffix **B** to Swivel Part #

Available for:

- 1 Series - TS1/BS1 (2" & 2-1/2" only)
- 2 Series - TS2/BS2
- 3 Series - TS3/BS3




Round Steel Plugs (RP)

Supplied in two sizes:

Plug Diameter	Reference #
1"	RP3
1-1/4"	RP5

Available for:

- 3 Series - BS3
- 4 Series - BS4




Foot Brake (H)

- For medium-duty swivel casters only
- Foot-operated pedal locks wheel
- To order, add suffix **H** to Swivel Part #

Available for:

- 4 Series - TS4/BS4 (4" & 5" only)
- 5 Series - TS5/BS5 (6" & 8" only)



Round Steel Plugs (RP)


Supplied in two sizes:

Plug Diameter	Reference #
1-3/8"	RP7
1-1/2"	RP8

To order, add Reference # to Swivel Part #

Available for:

- 5 Series - BS5




Wheel Lock (W)

- For swivel casters only
- A simple hand-operated parking lock
- To order, add suffix **W** to Swivel Part #

Available for:

- 4 Series - TS4/BS4
- 5 Series - TS5/BS5 (6" & 8" only)




Swivel & Wheel Lock (L)

- For swivel casters only
- The foot pedal locks both the wheel and swivel
- To order, add suffix **L** to Swivel Part #

Available for:

- 4 Series - TS4/BS4 (4" & 5" only)
- 5 Series - TS5/BS5 (6" & 8" only)



Expanding Steel Plugs (EP)

Supplied in four sizes:

Expands from	Reference #
23/32" to 25/32"	EP1
27/32" to 15/16"	EP2
31/32" to 1-1/32"	EP3
1-3/32" to 1-5/32"	EP4

To order, add Reference # to Part #

Available for:

- 3 Series - BS3
- 4 Series - BS4

