


SJE SERIES

Scaffold Casters


SJE Series scaffold casters from Revvo are zero offset swivel casters that conform to DIN 4422: HD 1004: 1992 and BS 1139: part 3: 1994. They are available in three wheel diameters (5", 6" & 8") with load capacities from 1,320 to 1,800 lbs. Durable "Nythane" wheels (polyurethane tire on nylon center) are standard. Solid nylon and rubber-tire wheels are available on special order. Single or double-pedal brake models are also available.



Single-pedal brake model with "Nythane" wheel.

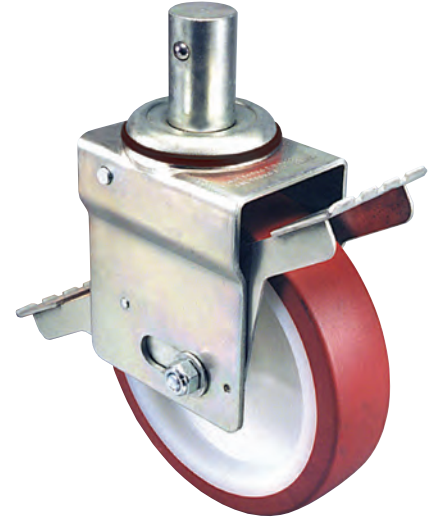

Double-pedal brake model with "Nythane" wheel.

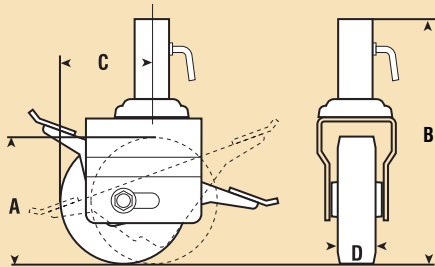

A = Wheel Diameter B = Overall Height C = Swivel Radius D = Tread Width


SJE SERIES

A	B	C	D	Load Capacity	Bearing	Wheel	Swivel Part #
5"	6-15/16"	6-1/2"	1-9/16"	1100	Plain	Rubber Tire	SJE 125 RU0G
5"	6-15/16"	6-1/2"	1-3/4"	1320	Plain	Nythane	SJE 125 NTOE
6"	7-1/2"	6-1/2"	1-3/4"	1800	Plain	Nylon	SJE 150 NY05
6"	7-1/2"	6-1/2"	1-3/4"	1800	Plain	Rubber Tire	SJE 150 RU05
6"	7-1/2"	6-1/2"	1-3/4"	1320	Plain	Nythane	SJE 150 NTOE
8"	9-1/2"	6-1/2"	2"	1800	Plain	Nylon	SJE 200 NY05
8"	9-1/2"	6-1/2"	2"	1800	Plain	Rubber Tire	SJE 200 RU05
8"	9-1/2"	6-1/2"	2-3/16"	1800	Plain	Nythane	SJE 200 NTOE

Options & Accessories


Single-Pedal Foot Brake (BX4)

- Single-ended operating brake pedal
- To order, add suffix **BX4** to Swivel Part#




Double-Pedal Foot Brake (D)

- Double-ended operating brake pedal
- To order, add suffix **D** to Swivel Part#



Socket Fitting (SC2)

- 2" W x 4" L socket-type top fitting
- To order, add **SC2** to Swivel Part#



Plug Fitting (B21)

- 1-1/2" W x 2" L plug-type top fitting
- To order, add **B21** to Swivel Part#

