


SL SERIES & SLF SERIES

The Flexello SL Series and SLF Series casters are available in sizes ranging from 4" to 8" with load capacities from 297 to 1,400 lbs. They feature a gold color, passivated zinc finish. The SL Series is a double ball bearing swivel caster; the SLF Series is a fixed version of the SL Series. These general-duty casters are ideal for a variety of typical working conditions that may include un-level floors, cracks, gullies, door rail guides, etc.



SL Series Swivel

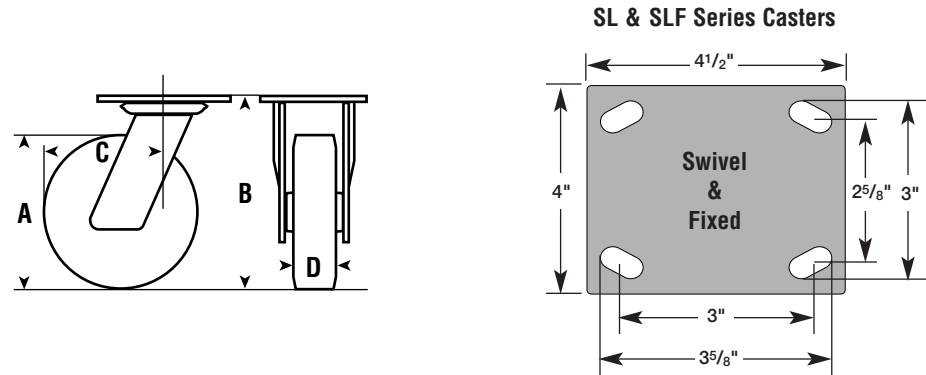

SLF Series Fixed



SL Series Swivel & Wheel Brake (6" & 8")

Swivel & Wheel Brakes

A combined swivel and wheel brake is available for the SL Series caster in 6" and 8" diameters. The adjustable foot-operated brake simultaneously brakes both the wheel and swivel head. A trip pedal releases the brake. The swivel radius is increased to approximately 6". To order, add suffix **SWB** to the Swivel Part #.

Foot Brakes

A foot brake is also available for the SL Series caster in all sizes except with cast iron wheels. To order, add suffix **BK** to the Swivel Part #. (Note: the foot brake is available as a retrofit item.)

2-Way Directional Wheel Locks

A two-way directional lock is available to convert the SL Series swivel caster to a fixed caster by the release of a spring-loaded plunger. The directional lock attachment is independent of the caster and is secured by the caster mounting bolts. To order, add suffix **L** to the Swivel Part #. (Note: The directional lock is available as a retrofit item.)

A = Wheel Diameter B = Overall Height C = Swivel Radius D = Tread Width

SL & SLF SERIES								
A	B	C	D	Load Capacity	Bearing	Wheel	Swivel Part #	Fixed Part #
4"	5-1/2"	3-1/4"	1-5/8"	297	Roller	Rubber on Steel	SL-4RTB	SLF-4RTB
4"	5-1/2"	3-1/4"	1-5/8"	550	Roller	Polyurethane on Cast Iron	SL-4SUB	SLF-4SUB
4"	5-1/2"	3-1/4"	1-1/4"	440	Roller	Nylon	SL-4NYB	SLF-4NYB
4"	5-1/2"	3-1/4"	2"	440	Roller	Phenolic	SL-4ANB	SLF-4ANB
4"	5-1/2"	3-1/4"	1-5/8"	440	Roller	Polyurethane on Nylon	SL-4PNB	SLF-4PNB
4"	5-1/2"	3-1/4"	1-1/2"	748	Roller	Cast Iron	SL-4CIB	SLF-4CIB
4"	5-1/2"	3-1/4"	2"	450	Roller	Polypropylene	SL-4PLRB	SLF-4PLRB
5"	6-1/2"	4"	1-1/2"	352	Roller	Rubber on Cast Iron	SL-5RTB	SLF-5RTB
5"	6-1/2"	4"	1-1/2"	594	Roller	Polyurethane on Cast Iron	SL-5SUB	SLF-5SUB
5"	6-1/2"	4"	1-1/2"	594	Roller	Nylon	SL-5NYB	SLF-5NYB
5"	6-1/2"	4"	2"	600	Roller	Phenolic	SL-5ANB	SLF-5ANB
5"	6-1/2"	4"	1-1/2"	550	Roller	Polyurethane on Nylon	SL-5PNB	SLF-5PNB
5"	6-1/2"	4"	1-5/8"	990	Roller	Cast Iron	SL-5CIB	SLF-5CIB
5"	6-1/2"	4"	2"	650	Roller	Polypropylene	SL-5PLRB	SLF-5PLRB
5"	6-1/2"	4"	1-1/2"	352	Roller	Rubber on Nylon	SL-5RNB	SLF-5RNB
6"	7-1/2"	4-3/4"	1-3/4"	814	Roller	Rubber on Cast Iron	SL-6RTB	SLF-6RTB
6"	7-1/2"	4-3/4"	1-3/4"	814	Ball Journal	Rubber on Cast Iron	SL-6RTBJ	SLF-6RTBJ
6"	7-1/2"	4-3/4"	1-3/4"	990	Roller	Polyurethane on Cast Iron	SL-6SUB	SLF-6SUB
6"	7-1/2"	4-3/4"	1-3/4"	990	Ball Journal	Polyurethane on Cast Iron	SL-6SUBJ	SLF-6SUBJ
6"	7-1/2"	4-3/4"	1-1/2"	847	Roller	Nylon	SL-6NYB	SLF-6NYB
6"	7-1/2"	4-3/4"	2"	1200	Roller	Phenolic	SL-6ANRB	SLF-6ANRB
6"	7-1/2"	4-3/4"	1-3/4"	990	Roller	Polyurethane on Nylon	SL-6PNB	SLF-6PNB
6"	7-1/2"	4-3/4"	1-3/4"	990	Ball Journal	Polyurethane on Nylon	SL-6PNBJ	SLF-6PNBJ
6"	7-1/2"	4-3/4"	1-3/4"	1200	Roller	Cast Iron	SL-6CIB	SLF-6CIB
6"	7-1/2"	4-3/4"	2"	750	Roller	Polypropylene	SL-6PLRB	SLF-6PLRB
6"	7-1/2"	4-3/4"	1-3/4"	594	Roller	Rubber on Nylon	SL-6RNB	SLF-6RNB
8"	9-1/2"	6-1/8"	2"	990	Roller	Rubber on Cast Iron	SL-8RTB	SLF-8RTB
8"	9-1/2"	6-1/8"	2"	990	Ball Journal	Rubber on Cast Iron	SL-8RTBJ	SLF-8RTBJ
8"	9-1/2"	6-1/8"	2"	990	Roller	Polyurethane on Cast Iron	SL-8SUB	SLF-8SUB
8"	9-1/2"	6-1/8"	2"	990	Ball Journal	Polyurethane on Cast Iron	SL-8SUBJ	SLF-8SUBJ
8"	9-1/2"	6-1/8"	1-1/2"	847	Roller	Nylon	SL-8NYB	SLF-8NYB
8"	9-1/2"	6-1/8"	2"	1400	Roller	Phenolic	SL-8ANRB	SLF-8ANRB
8"	9-1/2"	6-1/8"	2"	990	Roller	Polyurethane on Nylon	SL-8PNB	SLF-8PNB
8"	9-1/2"	6-1/8"	2"	990	Ball Journal	Polyurethane on Nylon	SL-8PNBJ	SLF-8PNBJ
8"	9-1/2"	6-1/8"	1-3/4"	1400	Roller	Cast Iron	SL-8CIB	SLF-8CIB
8"	9-1/2"	6-1/8"	2"	1000	Roller	Polypropylene	SL-8PLRB	SLF-8PLRB
8"	9-1/2"	6-1/8"	2"	880	Ball Journal	Rubber on Nylon	SL-8RNB	SLF-8RNB



SL Series Foot Brake (4" to 8")



SL Series Directional Lock